



CONSTRUCTION FEATURES

- **Energy Saving Pipe Wrap Kit** - reduces heat loss through plumbing lines.
- **Temperature and Pressure Relief Valve** - factory installed directly in the unit.
- **Watertight Grommets** - keep out overhead moisture and condensation.
- **Seamless Molded Non-metallic Inner Tank** - can't rust or corrode.
- **Fill (Dip) Tube** - high temperature polysulfone withstands thermal storage and high temperature commercial applications.
- **High-tech Heating Elements** - upper element with built-in fuse protects tank against "dry fire." Bottom element is long-life, low-watt density, stainless alloy.
- **Polyethylene Outer Jacket** - 'car bumper tough' to resist dents and scratches during transit, installation and beyond.
- **Envirofoam®** - a great energy saver and friendly to the ozone layer—it's made without CFCs and HCFCs.
- **Filament-wound Fiberglass Tank** - has unmatched strength.
- **Recessed Drain Valve** - out of the way of brooms, feet and ankles.

LIFETIME TANK WARRANTY*


Privately-owned, single family dwellings: The tank is guaranteed not to leak *for as long as you own your home*. If the home is sold, the warranty converts to 15 years from the date of manufacture. Parts are under warranty for 5 years from the date of purchase.

Commercial Use: If the heater is used in applications such as apartments, office restrooms, or for agricultural use, the tank is warranted for 10 years from the date of installation. Parts are warranted for 5 years in these applications (3 years in dairy barns).

Industrial Use: If the heated water produced by this unit is used in any commercial process, i.e., cleaning parts, agricultural produce or a component part of a product, the tank is warranted for 5 years from the date of installation. Parts: 1 year *See warranty information sheet for complete warranty information.

Must be installed by licensed plumber or electrician.

020316

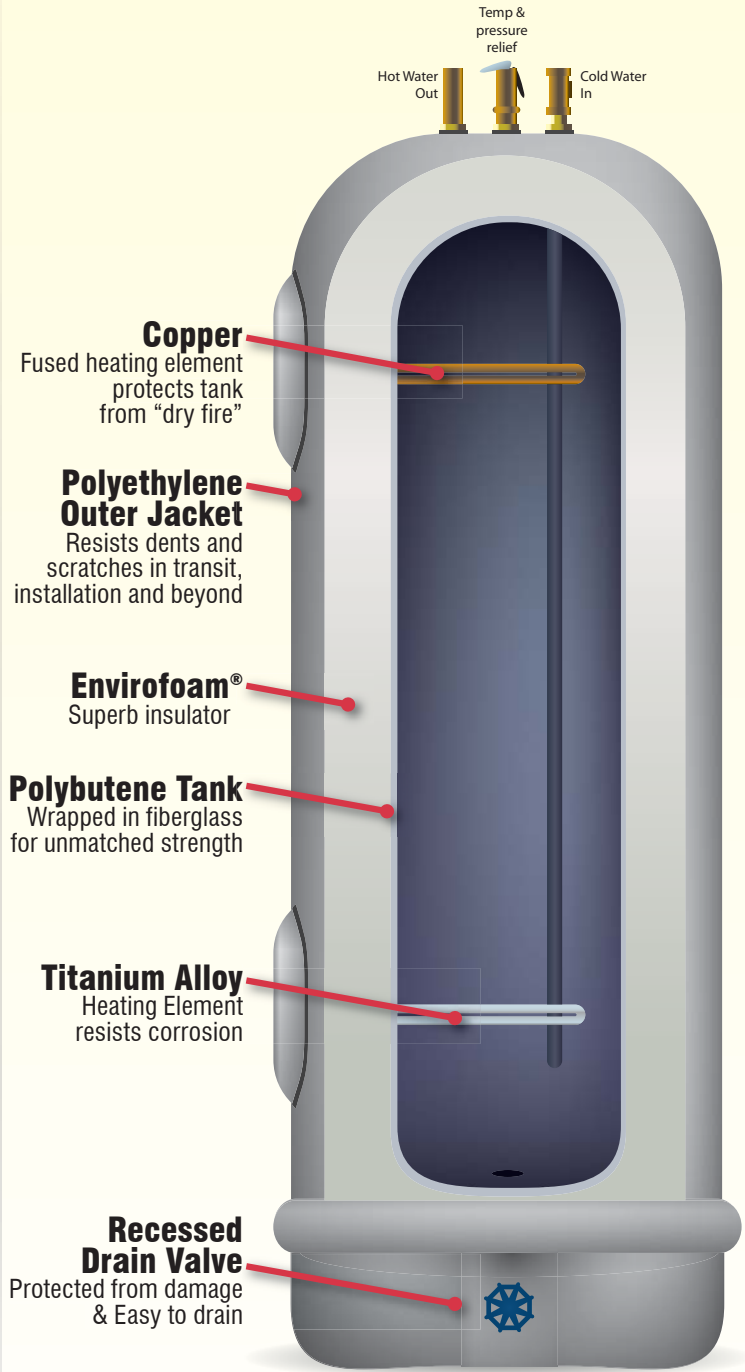

Copper

Fused heating element protects tank from "dry fire"

Polyethylene Outer Jacket

Resists dents and scratches in transit, installation and beyond

Envirofoam®

Superb insulator

Polybutene Tank

Wrapped in fiberglass for unmatched strength

Titanium Alloy

Heating Element resists corrosion

Recessed Drain Valve

Protected from damage & Easy to drain

Capacity	Wholesale Price	Rebate	Wattage	@ 90 Gal/Hr	1st Hr. Recovery 1st Hr. Rating	Energy Factor	Width	Tank Height	Plumbing Height	Shipping Weight
30	\$675	\$65	4500	20	42 gal.	.95	22"	49"	53"	75 lbs.
40	\$725	\$80	4500	21	52 gal.	.95	22"	62"	66"	90 lbs.
50	\$760	\$110	4500	21	61 gal.	.95	24"	63"	67"	100 lbs.

